NEONATAL INTENSIVE CARE EQUIPMENT

wallaby

All-round care
FOR THE BABY.

nice® 3010

CE 1434

Infant incubator with inbuilt weighing scale, servo-controlled humidity and oxygen.



nice Neötech

www.niceneotech.com

WHY WALLABY

Mother-like care, **ALL IN ONE PLACE.**

Wallaby gives low-weight, high-risk babies (under 36 weeks' gestation, up to 5 kg) a warm, closed and protected space. Heating, humidity, oxygen, pulse co-oximetry and weighing work together in one unit, so the baby can stay inside while the team treats and monitors.



A closed, warm, humidified space

The thick-walled hood keeps heat in; iris ports let hands in while letting very little air out.

01

Servo humidity

Set 20–95% relative humidity in 5% steps. 1.5 L see-through reservoir; alarm at ±10%.

02

Servo oxygen*

Set oxygen up to 65% inside the hood. An on-board sensor holds it; alarm at ±3%.

03

Masimo pulse co-oximeter*

Non-invasive SpO_2, pulse rate and Pi, plus SpHb, SpMet and PVi with rainbow sensors.

04

Built-in weighing scale*

Weighs the baby under the mattress without stopping treatment. Grams or pounds, with a growth trend.

05

Live camera*

A camera in the hood streams the baby securely, so parents and family can visit virtually.

06


Baby mode & Air mode

Servo heating to skin or air temperature. i-sense adds safety if the skin probe comes loose.

All controlled on one 8-inch touch display with full audio and visual alarms. *Optional

nice Neötech

DESIGNED AROUND THE BABY

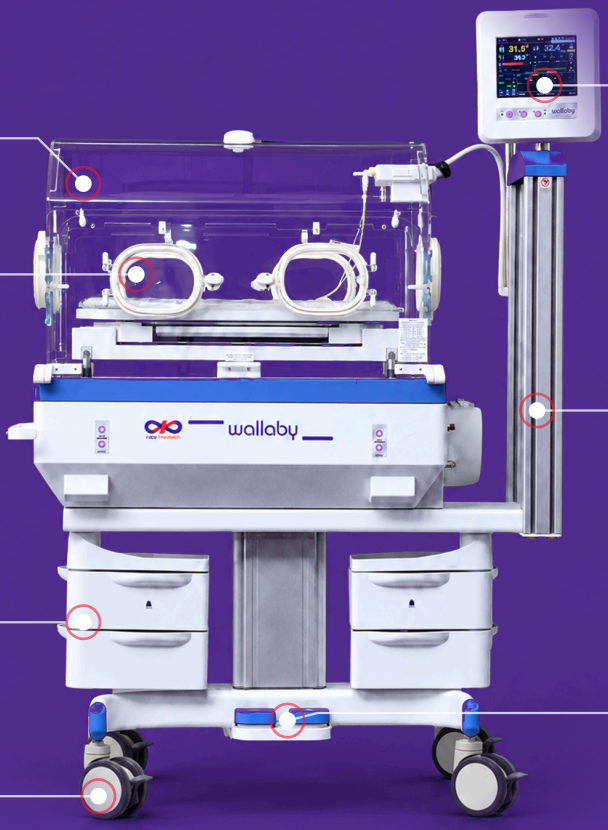

Rigid incubator hood
Firm walls that hold heat and stand up to daily use.

Iris ports
Reach the baby while very little air escapes.

4-drawer storage
Sleek drawers, each holding up to 3 kg.

Standard ground clearance
Over 120 mm: room for X-ray and other equipment.

8-inch touch display
Incubator, humidity, oxygen, Masimo and scale in one place.

Rail pole
Mount accessories close to the device.

Pedal height control
Motorised: bed from 900 to 1200 mm.



Bed slides out and rotates
Easy access for intubation and other procedures.



Stable base, smooth castors
Foot pedals set the height; drawers keep supplies close.

±12°	900–1200	≤25 min	39.3 °C
Jerk-free bed tilt, without opening the canopy	mm bed height, motorised pedal	pre-heat at 26–30 °C room temperature	automatic heater cut-off

nice Neötech

CONNECTED CARE

See every baby, **FROM ANYWHERE.**

32 beds

Central Nursing Station*

Wi-Fi CNS shows temperatures, humidity, oxygen, SpO_2, pulse, pleth, weight and live video for up to 32 beds.

Neonet

Mobile app*

Doctors follow each patient's data and progress on an Android phone, anytime, anywhere.

Live

Camera & trends

Live streaming* for families, and trend graphs from admission to discharge.

TECHNICAL HIGHLIGHTS

Patient	Infants up to 5 kg	Bed height	900–1200 mm, motorised pedal
Control modes	Baby (skin) mode, Air mode	Bed tilt	±12°, Trendelenburg / reverse
Display	8-inch LCD touch screen	Ground clearance	Over 120 mm
Humidity	Servo, 20–95% RH, 5% steps	Storage	4 drawers, up to 3 kg each
Water reservoir	1.5 L, visible level	Pulse co-oximetry	Masimo*: SpO_2, PR, Pi
Oxygen	Servo up to 65%*, or flowmeter	Apnea monitor	Respiration rate and alarms*
Pre-heat time	≤25 min at 26–30 °C	Connectivity	Wi-Fi CNS*, Neonet app*
Over-temperature	Heater cut-off at 39.3 °C	Quality	CE 1434 · ISO 13485:2016

EXTRA CARE FROM WALLABY

- Dimmable LED observation light
- APGAR timer, up to 59 min
- 5-colour status alarm
- Adjustable alarm volume
- Control-panel lock
- Bed slides out & rotates

nice Neötech

SALES

Customer Relationship Executive
+91 98408 73602
marketing1@niceneotech.com
marketing@niceneotech.com

SERVICE

Service Support
+91 93848 06402
+91 98408 73602
service@niceneotech.com

HEAD OFFICE & FACTORY

nice Neötech Medical Systems Pvt. Ltd.
#85-86, Krishna Industrial Estate, Mettukuppam,
Vanagaram, Chennai 600 095, Tamil Nadu, India
+91 44 2476 2594 · +91 44 2476 4608
info@niceneotech.com

www.niceneotech.com

nice Neötech representative:

CE 1434 · **An ISO 13485:2016 company (with design)**

*Optional. Features and specifications are correct at the time of printing. nice Neötech may change specifications without notice and can configure the device to meet hospital and treatment needs. 74-00-006, Rev 06